



Azzalin
International Valves Manufacturer



Azzalin® Floating Monobloc Ball Valves






EVO-MB Series
Exploded View





EVO-MB Series Section View

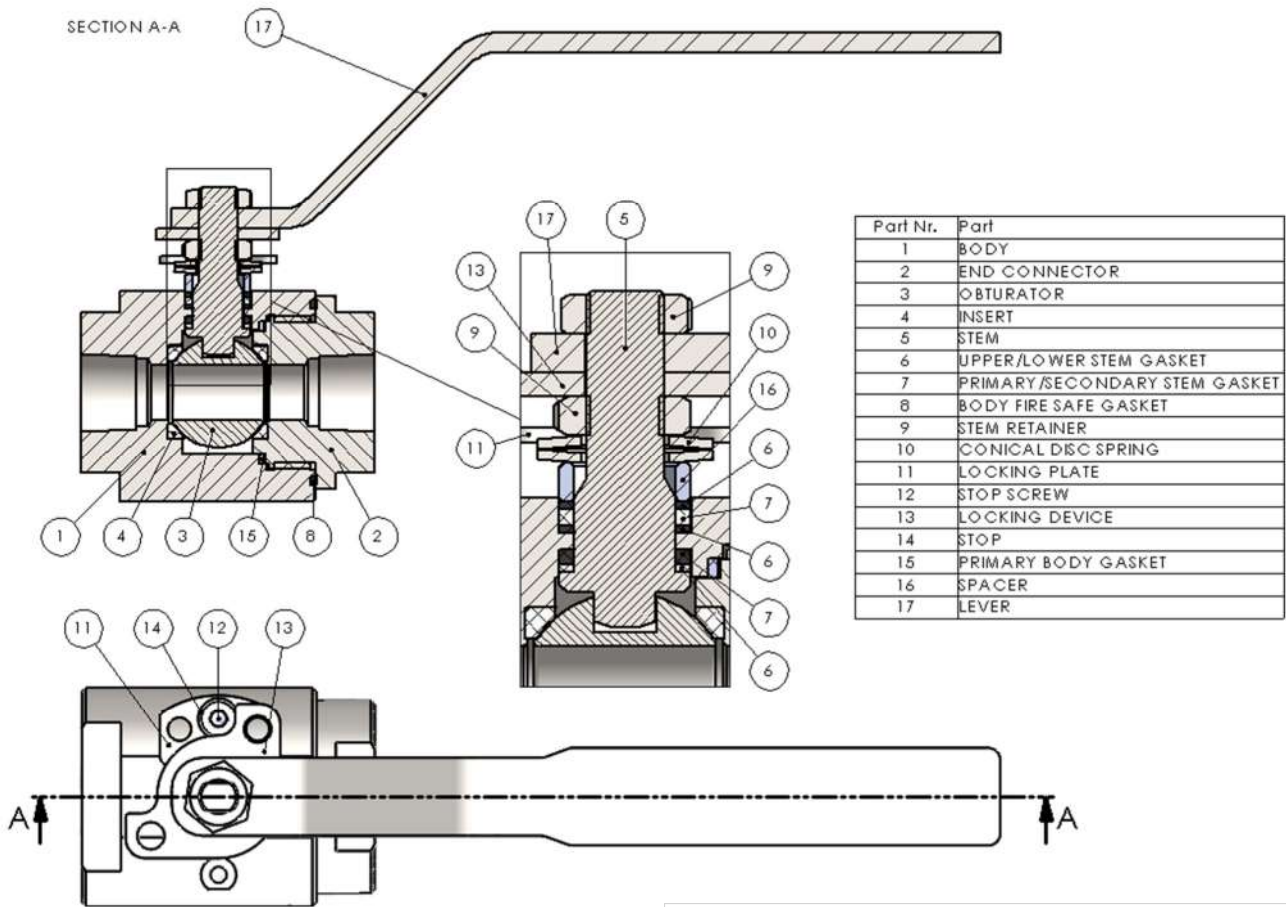

2-PC THREADED MONOBLOC - AZZALIN MODEL EVO-MB							
	150	300	600	800	900	1500	2500
1/8"	X	X	X	X	X	X	X
1/4"	X	X	X	X	X	X	X
1/2"	X	X	X	X	X	X	X
3/4"	X	X	X	X	X	X	X
1"	X	X	X	X	X	X	X
1.1/4"	X	X	X	X	X	X	X
1.1/2"	X	X	X	X	X	X	X
2"	X	X	X	X	X	X	X

FEATURES

- Monobloc body
- Floating ball
- Full and reduced bore
- End to end dimensions: manufacturer standard
- Antiblowout stem
- Antistatic device
- ISO 5211 top flange
- Ends: butt welding, socket welding, plain ends, threaded ISO GAS 228/1 & NPT ASME B1.20.1, male & female, integral nipples of any length

STANDARDS

- Min. thickness according to ASME B16.34
- Fire safe certified according to API 607 5th ed. & EN ISO 10497

- Body joints according to ASME VIII Div.1/Div.2 & ASME B16.34 upon request
- Wet materials according to NACE MR-0175

MATERIALS

- Body / end connector: carbon steel, stainless steel, duplex&superduplex, titanium upon request
- Obturator: stainless steel, duplex&superduplex, other upon request
- Stem: stainless steel, duplex&superduplex, other upon request
- Insert: PTFE, RPTFE, DEVLON, PEEK, other upon request
- Gaskets: PTFE, FKM, HNBR, PTFE+ELGILOY, GRAPHITE, other upon request
- Lever / stem fittings: stainless steel grade 304/316